
DR400 Standard Duty - 400 A

UL/CSA Ratings

- Max Amperage & Voltage 400 A, 600 VAC
- Current Interruption Capability Not for current interrupting
- Short Circuit Rating 18 kA

A withstand test was performed with RK1 current limiting fuses sized at at least 100% of the device's ampacity rating.

- Environmental Ratings Type 4X/IP66/IP67/IP69/IP69K
- Temperature Range Min -40°F/Max 140°F See pg 254 for temperatures outside of this range.
- Wiring Capacity Min 2 AWG Max 350 MCM* Aux Contacts - Prewired 14 AWG
- * Wire size to 500 MCM can be accommodated through use of Cable Reducing Adapters. See Accessory Spotlight.
- Certifications UL 1682, CSA C22.2 NO. 182.1,

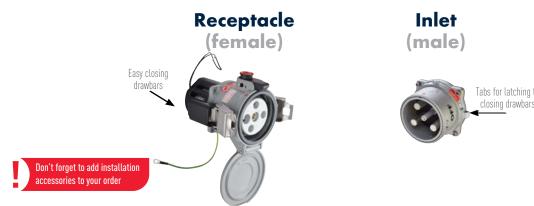

North	American	UL/CSA	Configu	rations

VOLTAGE	POLARITY	PART #	PART #
	PULARITY	METAL	METAL
208 V	3P+G+2PIL	39-44163-172	39-48163-172
250 V	3P+G+2PIL	39-44073-172	39-48073-172
480 V	3P+G+2PIL	39-44043-172	39-48043-172
600 V	3P+G+2PIL	39-44143-172	39-48143-172

Other voltage configurations are available - contact Customer Service at 800-433-7642

For international configurations and ratings (IEC,CE) visit meltric.com/international-catalog or contact Customer Service at 800-433-7642.

Key Feature Standard Locking Pawl



DR400 receptacles are provided with a screw-type locking pawl that prevents accidental disconnections under load.

RECEPTACLE OPTIONS	SUFFIX#	INLET OPTIONS	SUFFIX #
Self-Returning Lid (Manual Close)	Recept # -NC	Without Lockout Hole	Inlet # -A155



See pages 231-240 for detailed nation on these options

pgs 237-238

INSTALLATION ACCESSORIES - SIZE 7

LARGE HANDLE WITH NPT		PART #		
ANDI	2"	5T7P0N20		
	2 1/2"	5T7P0N25		
I	3"	5T7P0N30		
LARGE METAL HANDLE WITH CORD GRIP, MESH AND CABLE RANGE				

2.062-2.188" 5T7P0JT1 5T7P0JT2 2.188-2.312" require 2.312-2.438" 5T7P0JT3* stripping 2.437-2.625" 5T7P0KT1 iacket. 2.625-2.812" 5T7P0KT2


STRAIGHT HANDLE	CABLE RANGE	PART#	NPT	PART #
Bolt-on Clamp	1.57-1.97"	5K6P0D50	1 1/2"	5K6P0N15L
	2.01-2.36"	5K6P0D60	2"	5K6P0N20L
NPT	2.40-2.76"	5K6P0D70	2 1/2"	5K6P0N25L
	2.79-3.15"	5K6P0D80	3"	5K6P0N30L







Dimensions are for reference only and may change depending on accessories used. For precise dimensions contact MELTRIC Engineering.

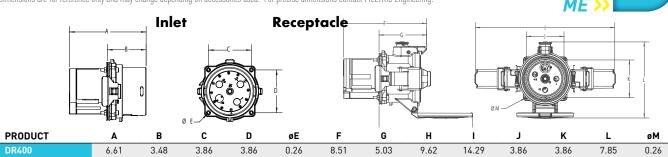

	F	Plug			Angle	e/Recepta	cle	G H	
			• · · · · · · · · · · · · · · · · · · ·						
PRODUCT	Α	В	С	D	E	F	G	Н	1
DR400	24.62	9.50	13.3	10.22	18.29	7.36	6.5	0.28	6.5